


SGA43 OZONE / OXYGEN SYSTEM

The Large SGA Series Ozone Generators are the most powerful air-cooled ozone/oxygen systems available, producing from 4.3 to 15.8 lbs./day of high concentration ozone. The SGA43 incorporates modular ozone system redundancy, high concentration ozone reactor cells, and an onboard oxygen concentrator system. The unit is housed in an attractive, compact floor-mount stainless steel enclosure.

The intuitive control panel design includes 0-100% variable output control, feed gas control, inlet air pressure and reactor back-pressure gauges, power supply feed back reference meter, and LED ozone production indicator. The control interface includes 0-10VDC or 4-20mA input signal for 0-100% variable ozone concentration control, as well as analog and fault indicator outputs.

A highly efficient, reliable ceramic/titanium reactor cell uses our exclusive Floating Plate Technology™ and is powered by an advanced, high-frequency, pulse modulated variable control power supply. Responsive, accurate ozone output control is assured by instantaneous amplitude modulation and the proven stability of our Floating Plate Technology™ reactor cell design.

The SGA43 Ozone Generator is engineered to meet the most demanding ozone application process requirements; yet it is easy to install, simple to operate, and will provide years of trouble-free operation.

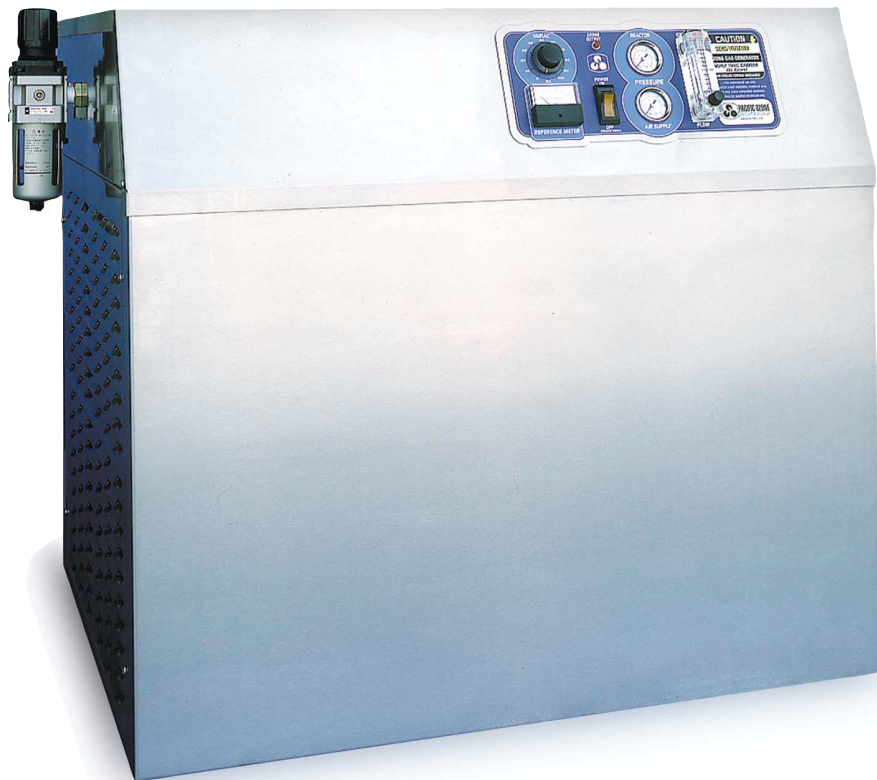


THE SGA43

FEATURES

- Stainless Steel Floor Mount Enclosure
- Air-Cooled Ceramic and Titanium Reactor Cell
- Onboard Oxygen Concentrator
- 5-Micron Filter/Regulator with Auto Drain
- Over Temperature Control
- Feed Gas Flow Control
- Redundant Ozone Chassis Design

CONTROLS

- Variable Output Control 0-100%
- Power Feed Back Reference Meter 0-10VDC
- Reactor Pressure Gauge 0-15 psi
- Air Input Pressure Gauge 0-60 psi
- Feed Gas Flow Control 0-100scfh
- LED Visual Ozone and Fault Indicators
- On/Off Lighted Circuit Breaker
- Analog Power Supply Output 0-10 VDC or 4-20mA External Control



**PACIFIC
OZONE**
TECHNOLOGY



SGA43 OZONE / OXYGEN SYSTEM

Product Description Integrated Ozone/Oxygen Generation System

Part Number R-SGA432 230V model

SPECIFICATIONS

Ozone Production	90 g/hr - 4.8 lbs./day
Oxygen Feed Gas Flow	60 scfh
Ozone Concentration	3% - 8% %/wt
Maximum Reactor Pressure	15 psi
Compressed Air Requirement	18 scfm
Compressed Air Pressure	40 psi
Feed Gas Flow Range	0-80 scfh
Variable Control	0-100%
External Control	0-10VDC or 4-20mA
Power Consumption	900 watts
Power Supply Fuse	8 ampere
On/Off Breaker	40 ampere
Air Cooling	480 scfm
Compressed Air Inlet Fitting	1/2" fnpt
Ozone Outlet Fitting	1/2" tube
Power Requirement	230V 50/60Hz 1 phase
Height	31 inches
Width	34 inches
Depth	29 inches
Weight	220 lbs.

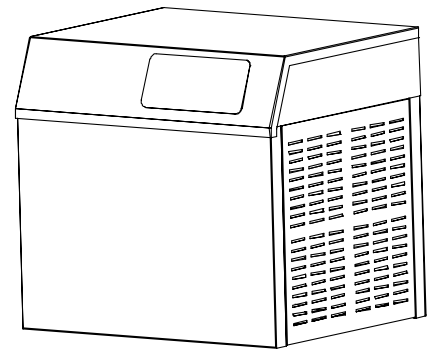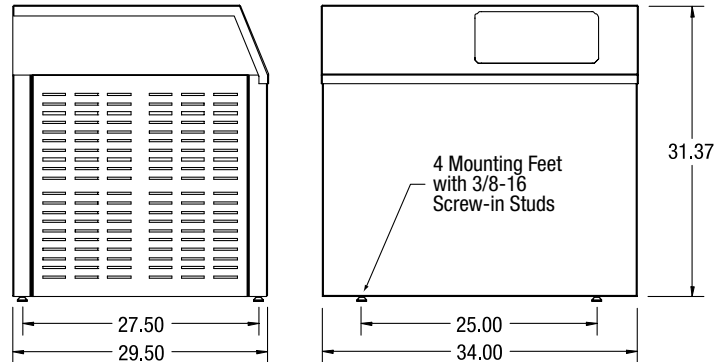

THE SGA43

OPTIONS
 Rotary Screw Compressor Kit 18 scfm @ 40 psi
 Coalescing Filter
 Replacement Filter Elements

An optional rotary screw compressor kit, with refrigerated air dryer and coalescing filters, is available to provide the compressed air requirement. If plant or other air source is used, the optional coalescing filter is required. See SGA air requirements for important compressed air quality requirements.

